


产品特点：与缺圆衬套组合使用，固定多棱定位方向。

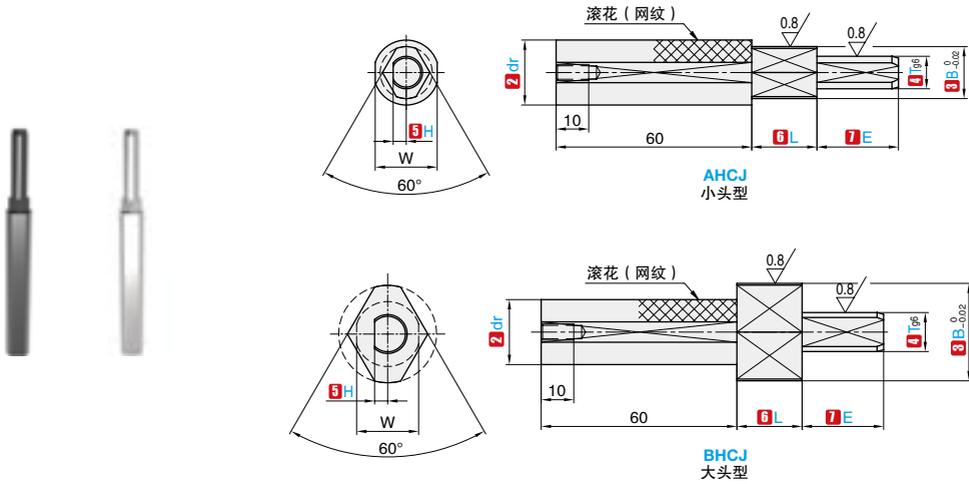

- ▲ 各段连接部带有宽度为 1mm 左右的退刀槽深约为 0.2mm，前端部带有中心孔。
- ▲ 产品手柄有时和销黏连在一起，若对其加热或施加外力，可能会导致脱落。
- ▲ 大头型无特别注明尺寸同小头型。

订购编号示例 **1** 代号 - **2** dr - **3** B - **4** T - **5** H - **6** L - **7** E - **8** 材料代码
 AHCJ - 10 - B4 - T3 - H1 - L6 - E5 - A

1 代号	2 dr	3 B 指定单位 0.01mm	4 Tg6 (B-1≥T)	5 H	6 L 指定单位 1mm	7 E 指定单位 1mm	W	T	g6									
AHCJ	10	4.00~8.00	3	1	5~25	5~25	8.4	3	-0.002 -0.008									
			4	1 1.5				4·5·6	-0.004 -0.012									
			5	1 1.5 2				8·10	-0.005 -0.014									
			6	1.5 2 2.5				12	-0.006 -0.017									
	12	6.00~10.00	3	1				5~25	5~25	10.5	3	-0.002 -0.008						
			4	1 1.5							4·5·6	-0.004 -0.012						
			5	1 1.5 2							8·10	-0.005 -0.014						
			6	1.5 2 2.5							12	-0.006 -0.017						
	16	8.00~14.00	3	1							5~25	5~25	14.8	3	-0.002 -0.008			
			4	1 1.5										4·5·6	-0.004 -0.012			
			5	1 1.5 2										8·10	-0.005 -0.014			
			6	1.5 2 2.5										12	-0.006 -0.017			
	20	12.00~18.00	3	1										5~25	5~25	19	3	-0.002 -0.008
			4	1 1.5													4·5·6	-0.004 -0.012
			5	1 1.5 2													8·10	-0.005 -0.014
			6	1.5 2 2.5													12	-0.006 -0.017
BHCJ	10	10.00~16.00	5	1 1.5 2	5~25	5~25	8.4										3	-0.002 -0.008
			6	1.5 2 2.5													4·5·6	-0.004 -0.012
			8	2 3													8·10	-0.005 -0.014
			10	3 4													12	-0.006 -0.017
	12	12.00~20.00	6	1.5 2 2.5				5~25	5~25	10.5							3	-0.002 -0.008
			8	2 3													4·5·6	-0.004 -0.012
			10	3 4													8·10	-0.005 -0.014
			12	4 5													12	-0.006 -0.017
	16	16.00~25.00	8	2 3							5~25	5~25	14.8				3	-0.002 -0.008
			10	3 4													4·5·6	-0.004 -0.012
			12	4 5													8·10	-0.005 -0.014
			10	3 4													12	-0.006 -0.017
	20	20.00~30.00	10	3 4										5~25	5~25	19	3	-0.002 -0.008
			12	4 5													4·5·6	-0.004 -0.012
			8	2 3													8·10	-0.005 -0.014
			10	3 4													12	-0.006 -0.017

代号	8 材料代码	材质	表面处理	硬度
AHCJ BHCJ	A B C	SUJ2	- 四氧化三铁保护膜 无电解镀镍	52~55HRC