


孔用挡圈



①代号	④材质	⑤硬度	⑥表面处理
RRKJA	弹簧钢	44-53HRC	发黑
RRKBA	304	36-44HRC	-

▲ d4为挡圈嵌入d3时最小轴径。()中的尺寸不适用材质304。
▲ 符合GB893.1-1986

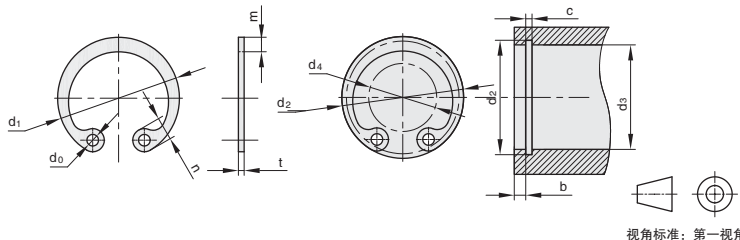

视角标准：第一视角



①代号 - ②公称代号
RRKJA - 5

订购编号示例

K1
圆柱销
油嘴
平键
挡圈
开口销

①代号	②公称代号	挡圈						参考	适用孔(参考)						
		d ₁		t		(m)	mind ₀		d ₄	d ₃	d ₂		c		b
		尺寸	公差	尺寸	公差						尺寸	公差	尺寸	公差	
RRKJA RRKBA	(9)	9.8		0.6	+0.04 -0.07	1.2	1.0	2	9	9.4	+0.09 0	0.7		0.6	
	10	10.8	+0.36 -0.10	0.8	+0.04 -0.10	1.7		1.5	2	10	10.4	0.9			
	11	11.8						3	11	11.4					
	12	13						4	12	12.5					
	13	14.1	2.1	1.0				1.7	4	13	13.6	+0.11 0	1.1	0.9	
	14	15.1						5	14	14.6					
	15	16.2						6	15	15.7					
	16	17.3	+0.42 -0.13	1.2				7	16	16.8	+0.13 0	1.3	1.5		
	17	18.3						8	17	17.8					
	18	19.5						9	18	19					
	19	20.5	+0.50 -0.25	1.5	+0.05 -0.13	2.5	2	10	19	20	+0.21 0	1.7	3.0		
	20	21.5						10	20	21					
	21	22.5						11	21	22					
	22	23.5	+0.90 -0.39	2.0				12	22	23	+0.25 0	2.2	4.5		
	24	25.9						13	24	25.2					
	25	26.9						14	25	26.2					
	26	27.9	+1.10 -0.46	2.5	+0.06 -0.18	5.2	3.0	15	26	27.2	+0.30 0	2.7	5.3		
	28	30.1						17	28	29.4					
	30	32.1						18	30	31.4					
	31	33.4	+1.30 -0.54	3.0				19	31	32.7	+0.35 0	2.7	5.3		
	32	34.4						20	32	33.7					
	34	36.5						22	34	35.7					
	35	37.8	+1.30 -0.54	3.5				23	35	37	+0.35 0	2.7	5.3		
	36	38.8						24	36	38					
	37	39.8						25	37	39					
	38	40.8	+1.30 -0.54	4.0				26	38	40	+0.35 0	2.7	5.3		
	40	43.5						27	40	42.5					
	42	45.5						29	42	44.5					
	45	48.5	+1.30 -0.54	4.7				31	45	47.5	+0.35 0	2.7	5.3		
	47	50.5						32	47	49.5					
48	51.5	33						48	50.5						
50	54.2	+1.30 -0.54	5.2				36	50	53	+0.35 0	2.7	5.3			
52	56.2						38	52	55						
55	59.2						40	55	58						
56	60.2	+1.30 -0.54	5.7				41	56	59	+0.35 0	2.7	5.3			
58	62.2						43	58	61						
60	64.2						44	60	63						
62	66.2	+1.30 -0.54	6.3				45	62	65	+0.35 0	2.7	5.3			
63	67.2						46	63	66						
65	69.2						48	65	68						
68	72.5	+1.30 -0.54	6.8				50	68	71	+0.35 0	2.7	5.3			
70	74.5						53	70	73						
72	76.5						55	72	75						
75	79.5	+1.30 -0.54	7.3				56	75	78	+0.35 0	2.7	5.3			
78	82.5						60	78	81						
80	85.5						53	80	83.5						
85	90.5	+1.30 -0.54	7.7				68	85	88.5	+0.35 0	2.7	5.3			
88	93.5						70	88	91.5						
90	95.5						72	90	93.5						
95	100.5						75	95	98.5						

▲ ()尺寸只适用弹簧钢材质。