



①代号	类型	④材质	⑤表面处理	⑥附件
RAPSB	梯形槽	45#	四氧化三铁保护膜	内六角螺钉×2(35CrMo)
RAPAY		A6061	本色阳极氧化	
RCP SB	弧形槽	45#	四氧化三铁保护膜	内六角螺钉×2(不锈钢)
RCPAY		A6061	本色阳极氧化	

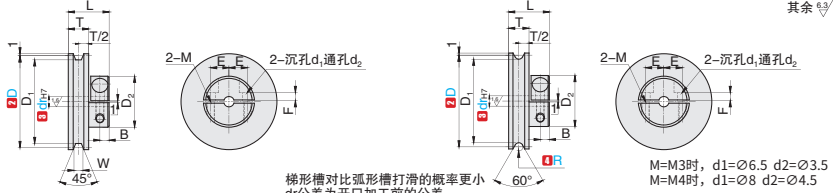

梯形槽  
RAPS BRAPAY

弧形槽  
RCP SB RCPAY



①代号 - ②D - ③dr轴孔规格 - ④皮带半径/R - ⑤追加工代码  
 RAPS B - D20 - d6.35 - R2  
 RCP SB - D50 - d11 - R2.5 - DS

①代号	主要尺寸															
	②D	③dr	④ 配套皮带半径(梯形槽)/R(弧形槽)	D <sub>1</sub>	D <sub>2</sub>	T	L	B	W	E	F	M(粗牙)				
RAPSB RAPAY RCP SB RCPAY	20	4-5	1	18	16	5	11	2.5	2.2	5	3	M3				
	30	4.5-6-6.35-8		28	20					7	3.5					
	40			38	20					16	2.5		3.3	7	3.5	
	30			27										9	4.5	
	40	5-6-6.35-8	1.5	37	25	10	20	4.5	3.3	9	4.5	M4				
	45			42						7	3.5					
	60	5-6-6.35-8-10-11-12	2	57	20	16	2.5	4.4	9	4.5	M4					
	23			19								7	3.5			
	28			24								25	20	4.5	9	4.5
	30			26												
	40	5-6-6.35-8	2	36	10	16	2.5	4.4	9	4.5	M4					
	45			41								7	3.5			
	48			44								25	20	4.5	9	4.5
	60			56												
	80	5-6-6.35-8-10-11-12	2.5	76	20	16	2.5	4.4	9	4.5	M4					
	28			23								7	3.5			
	40	5-6-6.35-8	1.5	35	25	10	20	4.5	3.3	9	4.5	M4				
	48			43									7	3.5		
	50	5-6-6.35-8-10-11-12	3	45	20	16	2.5	4.4	9	4.5	M4					
	60			55								7	3.5			
75	70			25								20	4.5	6.6	9	4.5
80	75															
28	5-6-6.35-8	1.5	22	10	20	4.5	4.4	7	6.5	3.5	M3					
38			32									7	3.5			
48	5-6-6.35	2	42	25	10	20	4.5	4.4	9	4.5	M4					
50			44									7	3.5			
58	5-6-6.35-8-10-11-12	3	52	20	16	2.5	4.4	9	4.5	M4						
60			54								7	3.5				
75			69								25	20	4.5	6.6	9	4.5
95			89													
100			94													



⑤追加工类型	外径缩短	
代号	DS	
示例图		
详细信息	切割外圆减少外径尺寸	
	皮带半径/R	
	适用规格	DS
	1	D+0.8
	1.5	D+1.2
2	D+1.6	
2.5	D+1.8	
指定方法	DS	

仅适用于皮带半径1.5-2-2.5的产品外圆切割的加工面可能不进行表面处理